


**Ordering-form for spacer-rings  
with Omega-Springs**

<b>Customer:</b>

<b>Date of delivery:</b>	
<b>Order-No.:</b>	
<b>Date of order:</b>	

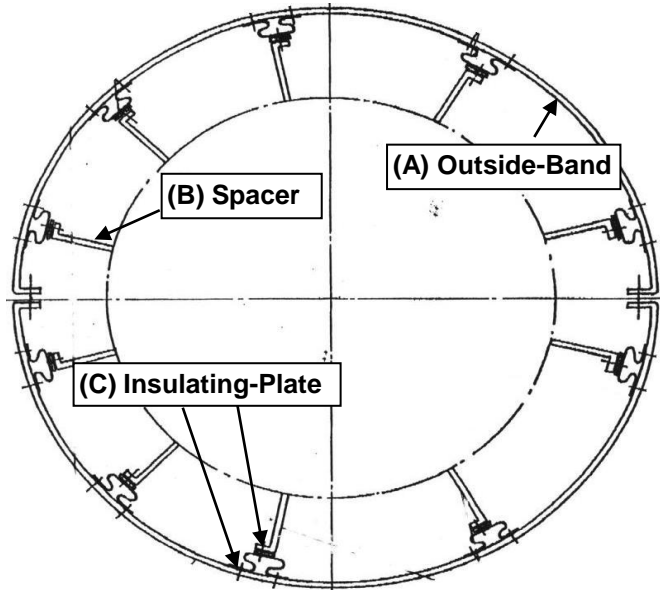

**Please select:**

- Omega-Spring out of material C75 (raw)
- Omega-Spring out of material 1.4310 (stainless-steel)

Quantity	Pipe-diameter (outside)	Thickness of insulation = total ISO	distance between the spacers: 1. distance up to ??? mm or 2. as per DIN 4140 or AGI	A	B	C Thickness of Insulating-Plate 3 mm or 5 mm
				Material and measurement of outside-band	Material and measurement spacers	
				30x3 or 40x4 mm raw, galv., 16MO3, V2A, ALU...		